

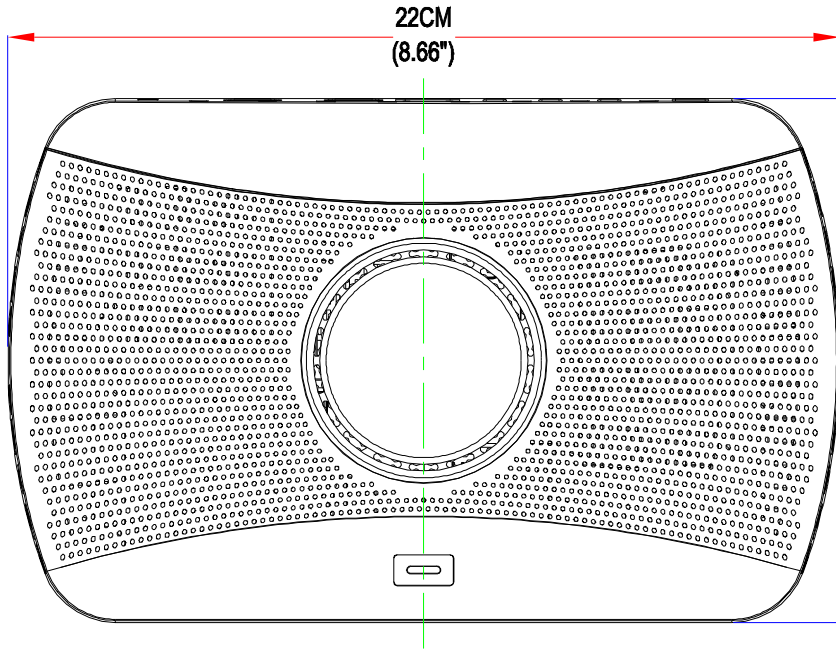
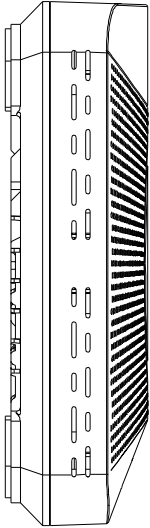
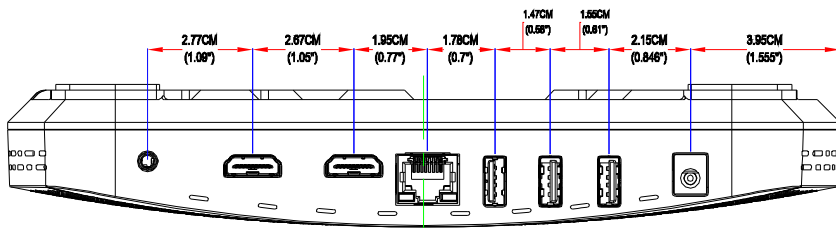




VESA mount onto the receiver using four M4 screws
(Screw spec: thread diameter 0.4cm, thread pitch 0.05cm,
minimum length: 0.6 cm. If VESA bracket thickness is 2mm,
then the screw length can be 8mm)




Wall mounting use #6 screw

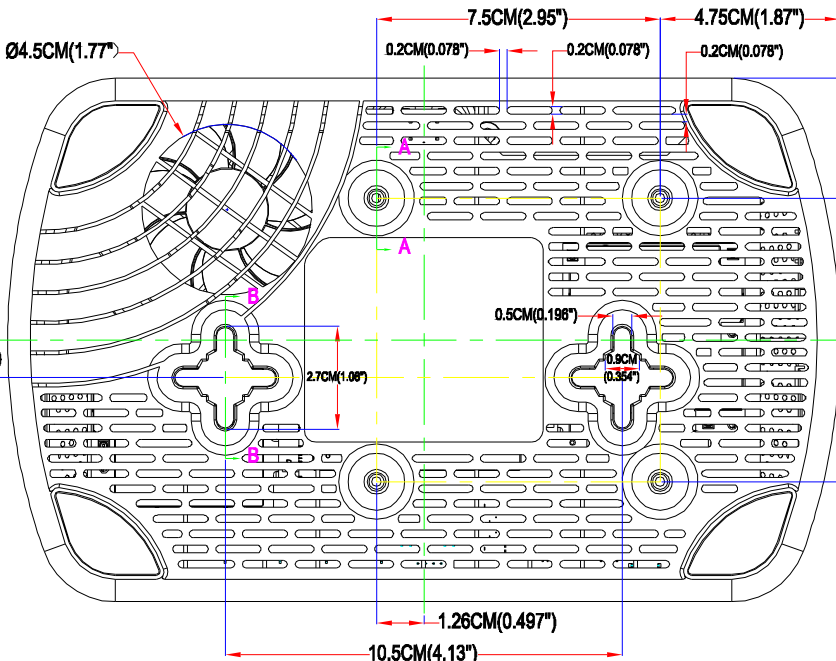

Isometric view

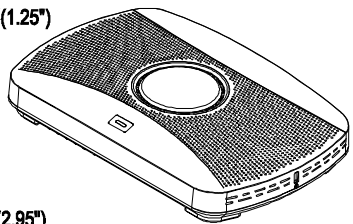

(SCALE:1:5)

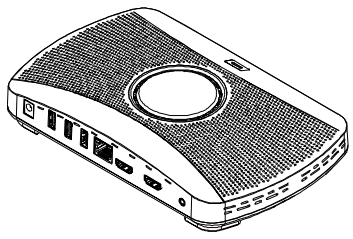

(SCALE:1:5)

© 2024 ScreenBeam Inc.

						NAME	DATE	ScreenBeam Inc.		
						DRAWN				
						APPROVED				
REV.	DESCRIPTION	ECO NO.	UPDATE BY	DATE	APPROVED	SCALE	1:2	BORDER SIZE	DRW. NO.:	REV.
						PROJECT	SBWD1100P/ 1000EDUG2 /1100F	8.5"x11"	0001	A1