

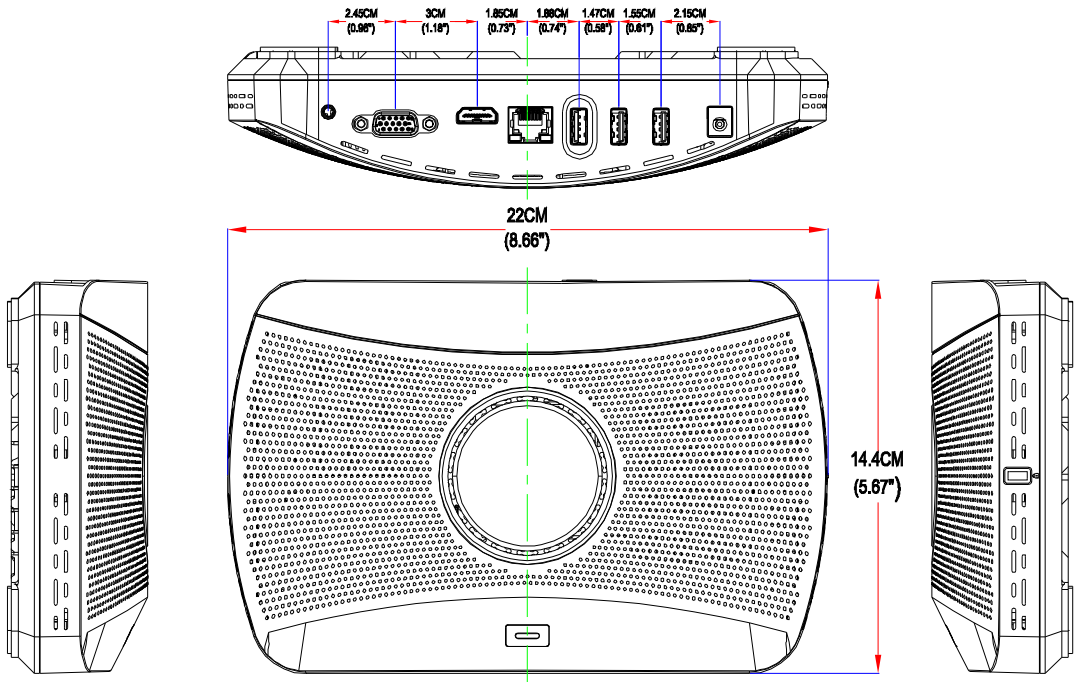




VESA mount onto the receiver using four M4 screws (Screw spec: thread diameter 0.4cm, thread pitch 0.05cm, minimum length: 0.6 cm. If VESA bracket thickness is 2mm, then the screw length can be 8mm)



Wall mounting use #6 screw

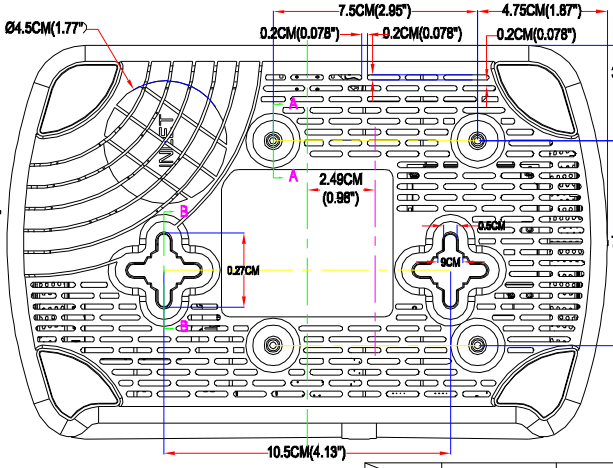

© 2019 ScreenBeam Inc.

						NAME	DATE	ScreenBeam Inc.		
						DRAWN				
						APPROVED				
						SCALE	1:2			
						PROJECT	SBWD1100			
REV.	DESCRIPTION	ECO NO.	UPDATE BY	DATE	APPROVED			BORDER SIZE	DRW. NO.:	REV.
								8.5"x11"	1100-0001	A1